


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500      Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>		<b>110185</b>
	Approved	TWH	Date 08/30/10
	Distribution : USER		Rev. 2 (10/24/13)

**N Bulkhead Adapter, Jack to Jack**

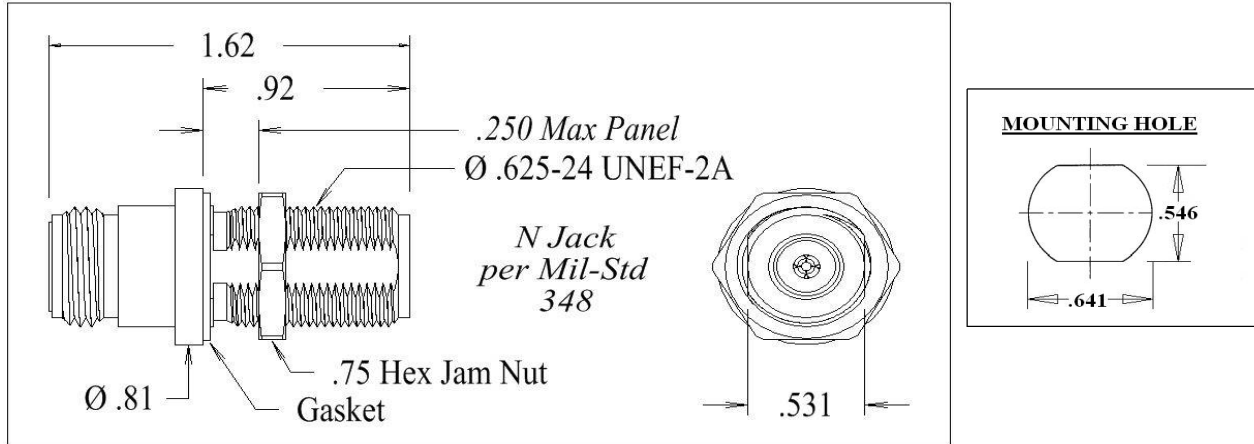

**PERFORMANCE**

Nominal Impedance      50 Ohms  
Frequency Range          DC - 11 GHz

**CONNECTOR WEIGHT (Each)**

1.68 ounces (47.65 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

**CONSTRUCTION**

**Materials:**

Body	Brass
Mounting Nut	Brass
Bushing	Brass
Center Contact	Beryllium Copper
External Gasket	Silicone Rubber
Internal Gasket	Silastic Rubber
Insulator	Co-polymer of Styrene

**Finish :**

Center Contact	Silver
Body, Mounting Nut	Nickel
Bushing	Nickel

<i>Applicable Standards</i>	MIL-STD 348
	MIL-C-39012
	UG-30/U