


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	110521
	Approved <i>MCT</i>	Date 2/2/2009
	Distribution : USER	Rev. 1 (06/25/13) Uncontrolled Document

ETNC Straight Plug with Safety Wire Holes
for S29113

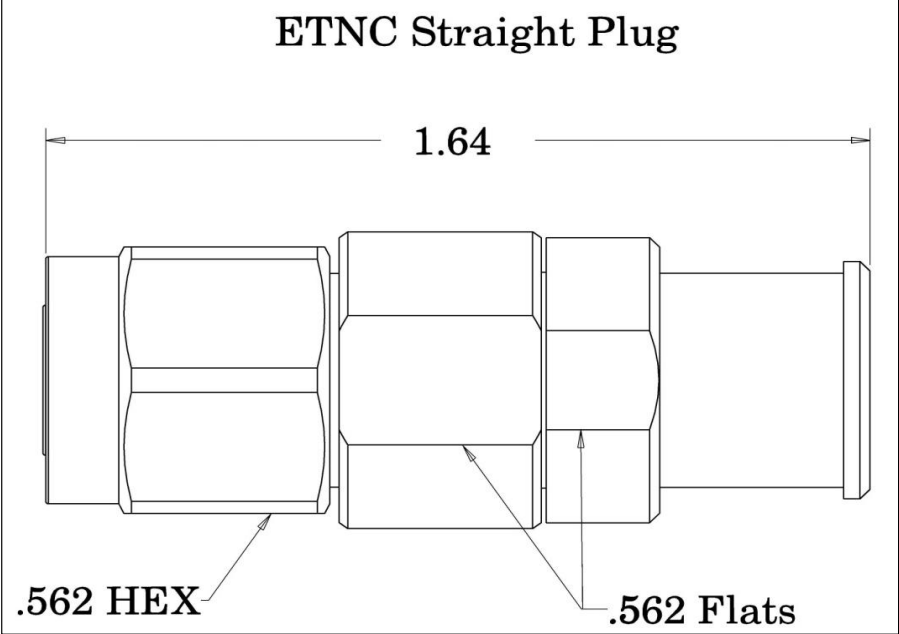

Note: With safety wire holes

PERFORMANCE

Nominal Impedance 50 Ohms
Frequency Range DC - 18 GHz

CONNECTOR WEIGHT (Each)

tbd

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Crimp Tooling:
Solder-on Termination

CONSTRUCTION

Materials:
Body Stainless Steel
Coupling Nut Stainless Steel
Center Contact Beryllium Copper
Insulator PTFE
Gasket Silicon Rubber

Finish :
Center Contact Gold
Body and Coupling Nut Passivated

Applicable Standards MIL-C-87104/2

Notes :
1) Please refer to T-110521 Termination Instruction sheet for strip dimensions & instructions.