
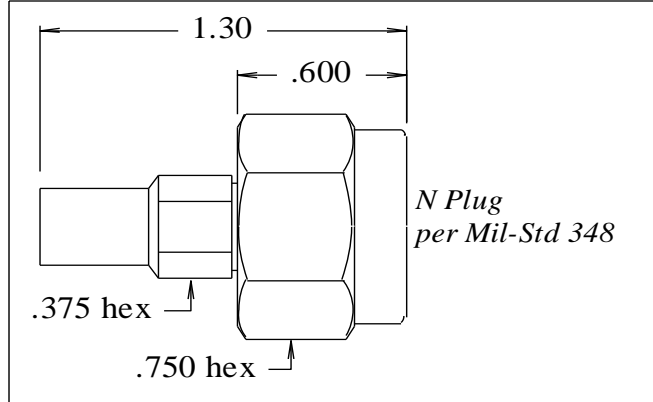


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110607</b>
	Approved 	Date 05/04/10
	Distribution : USER	Rev. 2 (06/20/13) Uncontrolled Document

**N Straight Plug**  
for S29156



*Features Not Shown: Seal in front*

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	0 - 18 GHz
Voltage Rating	335 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

tbd

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

Solder-on / Clamp Termination

**CONSTRUCTION**

***Materials:***

Body	Stainless Steel
Coupling Nut	Stainless Steel
Center Contact	Brass
Solder Bushing	Brass
Dielectric	PTFE Fluorocarbon

***Finish :***

Body	Passivated
Coupling Nut	Passivated
Center Contact, Bushing	Gold

<i>Applicable Standards</i>	MIL-STD 348 MIL-PRF-39012
-----------------------------	------------------------------

***Notes :***

- 1) A 2.0" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-110607 Termination Instruction sheet for strip dimensions & instructions.