

PIC Wire & Cable**Connector Specification****P/N 110772***A Division of the Angelus Corporation*Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

Approved :

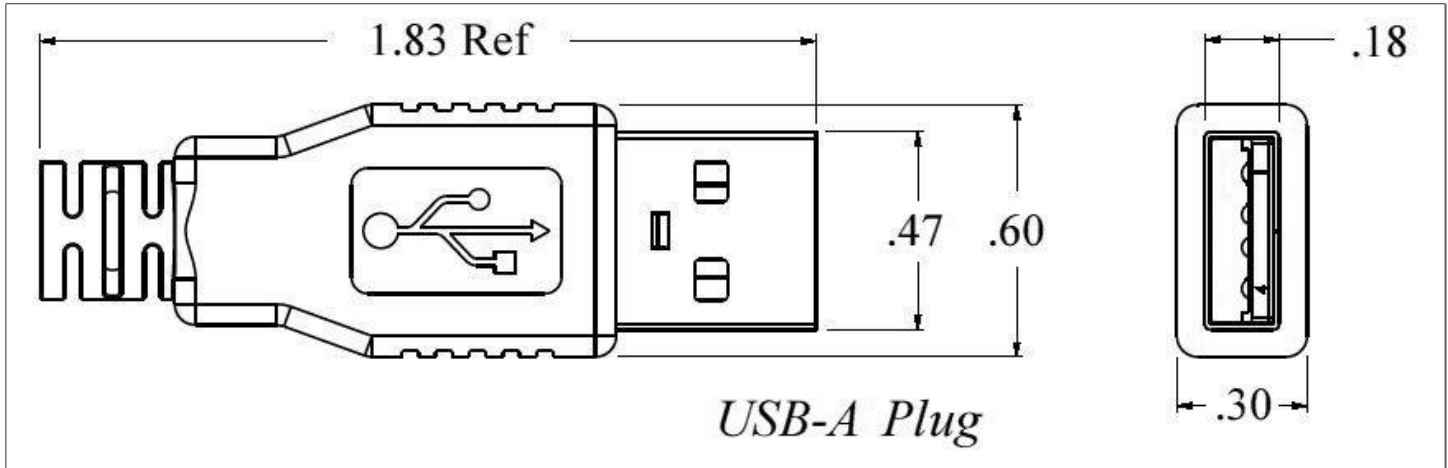
MCT

Date : 03/10/14

Rev 1 : 06/12/14

Distribution : USER

Uncontrolled Document

USB 2.0 A Plug Connector**PERFORMANCE**

Voltage Rating 30 VAC (R.M.S.)

Temperature Rating - 55° to + 85° C

CONNECTOR WEIGHT (Each)

.27 ounces (7.71 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Crimp Tool for crimping
strain relief/cable shield - Tyco P/N 58433-1
Similar size circular crimp is acceptable.

CONSTRUCTION***Materials:***

Body Steel

Contact Brass

Insulator Thermoplastic, UL 94V-0

Hood ABS Resin - LSZH

Finish :

Contact Gold

Body Nickel

Applicable Standards USB 2.0***Notes :***

1) Two 1.0" pieces of Raychem ATUM heat shrink,
P/N's ATUM-8/2-0 (1 ea.) & ATUM-4/1-0 (1 ea.) provided
with connector for strain relief & moisture protection.

2) Please refer to T-110772 Termination Instructions
for stripping dimensions & instructions.