
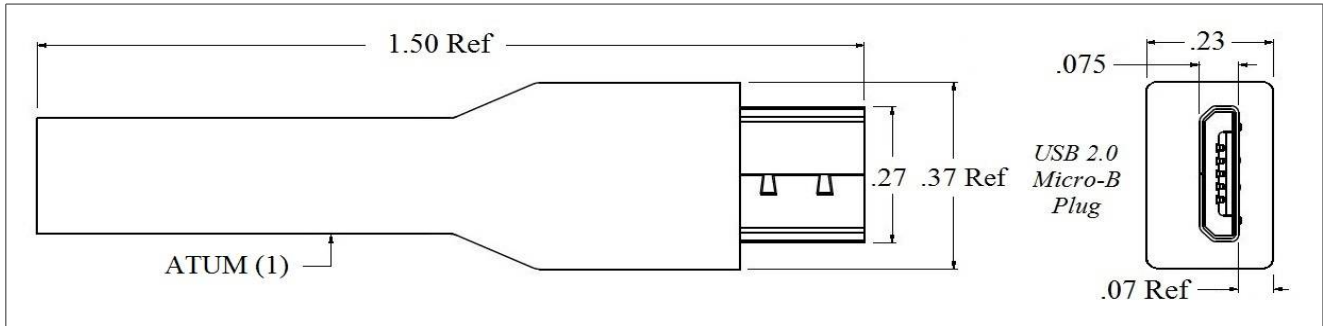


PIC Wire & Cable	Connector Specification	P/N 110838
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 09/16/14
	Distribution : USER	Rev : 0
		Uncontrolled if Printed

USB 2.0 Micro-B Plug Connector



PERFORMANCE

Voltage Rating	30 VAC (R.M.S.)
Contact Current Rating	1.5 Amps
Temperature Rating	- 30° to + 85° C

CONNECTOR WEIGHT (Each)

.08 ounces (2.27 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Please refer to T-110838 Termination Instruction Sheet for strip dimensions & instructions.

Recommended Crimp Tool for strain relief/cable shield :
 Amp (Tyco) 220066-1 Circular Crimp Tool, cavity C (Ø .163)
 Similar size circular crimp is acceptable.

CONSTRUCTION

Materials:

Shell	Steel
Contact	Phosphor Bronze
Insulator	Thermoplastic, UL 94V-0

Finish :

Contact	Gold
Body	Nickel

Applicable Standards USB 2.0

Notes :

- 1) Raychem ATUM-8/2-0 × 1.25" heat shrink supplied with connector for strain relief & moisture protection.