

A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 N220 W1051 Springdale Rd, Waukesha, WI 53186

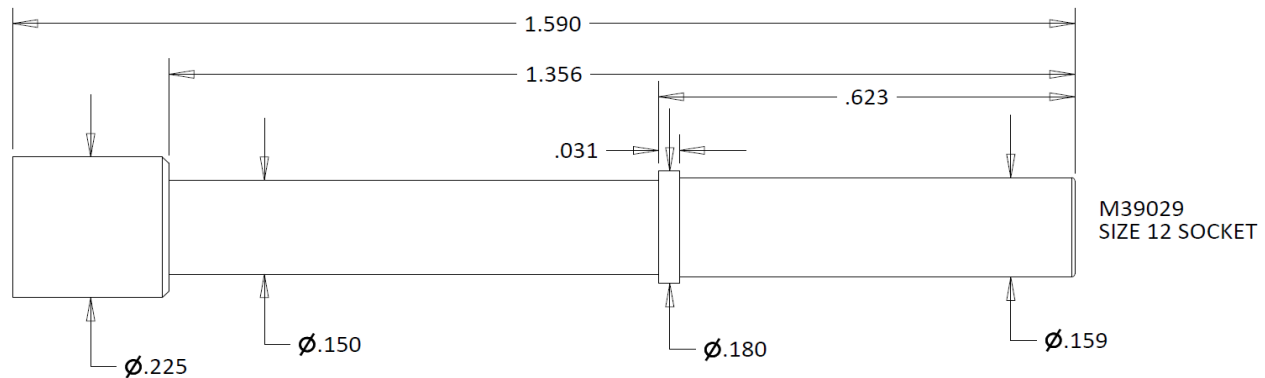
Approved : *PFT*

Date : 12/01/21
 Rev : 1 (06/13/22)

Distribution : USER

Uncontrolled if Printed

Direct Solder M39029 Size 12 Socket, w/o Sleeve
for UH44193

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	0 - 6 GHz
Voltage Rating	250 V(rms)
Insulation Resistance	5000 Megohms
DW Voltage	500 V (rms)
VSWR (max)	1.35:1
Insertion Loss (max)	0.30 dB max @ 6 GHz
Insertion Loss	$0.12 * \sqrt{F(\text{GHz})}$

CONNECTOR WEIGHT (Each)

.16 ounces (4.62 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Center Contact**

Solder Only

Cable Entry

Solder Only

CONSTRUCTION**Materials:**

Body	Beryllium Copper, ASTM-B196 C17300, Temper TD04
Cable Contact	Beryllium Copper, ASTM-B196 C17300, Temper TD04
End Cap	Corrosion Resistant Steel, ASTM-A582, S30300, Cond. A
Dielectric	PTFE, ASTM D1710, Type 1, Grade 1, Class A

Finish :

Body, Cable Contact	Gold Plate per ASTM B488
End Cap	Passivate per SAE-AMS2700

APPLICABLE STANDARDS

MIL-C-39029 / 103
 for MIL-C-38999 Series I, III, IV

Notes :

- 1) A 1.0" piece of Raychem Versafit Ultra-Thin Walled Heat Shrink P/N V4-6.0-0-SP-SM provided with contact for purpose of insulating between contacts in final installation.
- 2) Please refer to T-150157 Termination Instruction sheet for strip dimensions & instructions.
- 3) Requires extraction tool P/N 111203 to remove from installation
- 4) For use in high density D38999 connectors or in fully sealed environments. Please contact our team for assistance