


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	110297
	Approved 	Date 01/23/04 Rev. 1 (06/25/13)
	Distribution : USER	Uncontrolled Document

N Bulkhead Jack
for S29113

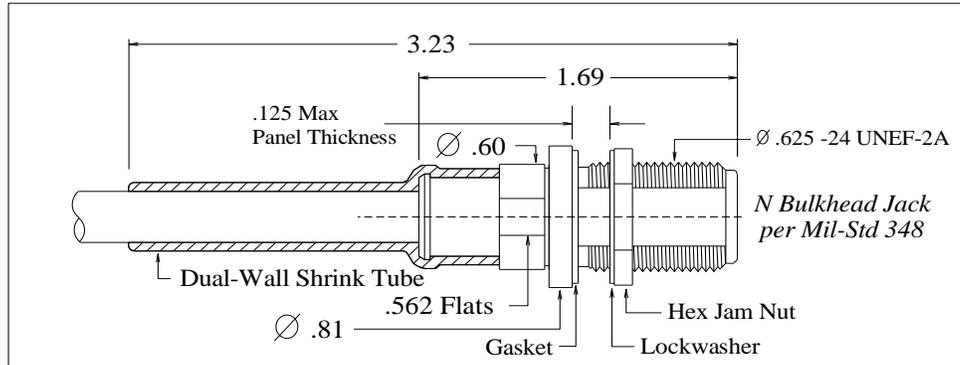

PERFORMANCE

Nominal Impedance	50 Ohms
Frequency Range	0 - 18 GHz
Voltage Rating	1000 VRMS
Insulation Resistance	5000 Megohms

CONNECTOR WEIGHT (Each)

tbd

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Crimp Tooling:

Solder Sleeve / Clamp-Type Termination

CONSTRUCTION

Materials:

Body	Stainless Steel
Center Contact	Beryllium Copper
Dielectric	TFE Fluorocarbon

Finish :

Body	Passivated
Center Contact	Gold

Applicable Standards

MIL-STD 348
MIL-PRF-39012

Notes :

1) Please refer to T-110297 Termination Instruction sheet for strip dimensions & instructions.

