M39029 Size 12 Coax Pin Contact

for V73263, V75268 and V76261

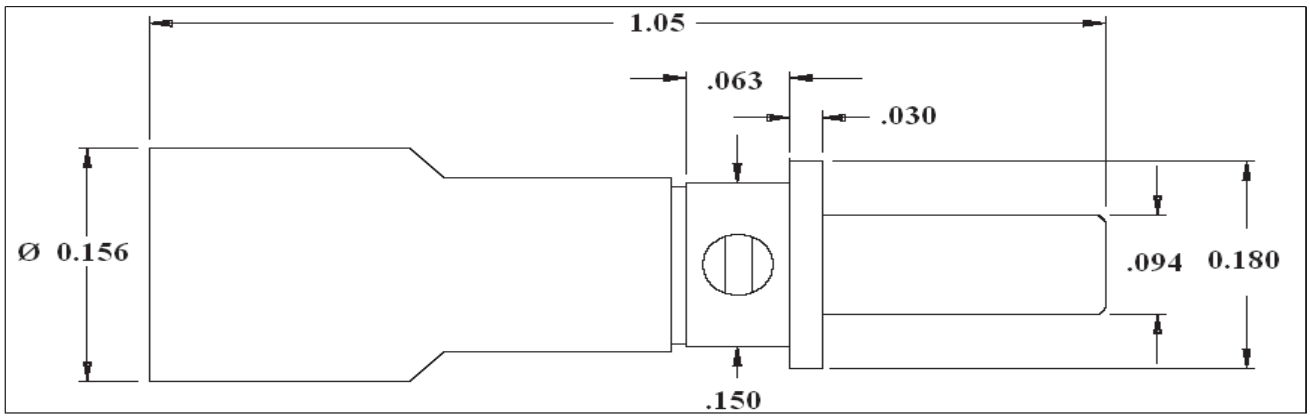

PERFORMANCE

Nominal Impedance : Non-Constant

Temperature Range : -55 °C to 125 °C

CONNECTOR WEIGHT

.020 ounces (0.560 grams)

MATES WITH

PIC P/N 110500 - Size 12 Socket Contact

RoHS COMPLIANT

Does not comply to RoHS standards

CONSTRUCTION

Materials :

Contact Body : Beryllium Copper
ASTM B196

Inner Contact : Beryllium Copper
ASTM B196

Dielectric : ETFE
ASTM D3159

Finish :

Contact Body : Gold over Nickel
Outer Contact : Gold over Nickel

Applicable Standards :

M39029/28
MIL-C-38999 Series I, III and IV

Notes *:*

1) Please refer to TV-110510 Termination Instruction sheet for strip dimensions & instructions.

PIC Wire & Cable Connector User specification sheets are non-controlled documents if printed. Please contact PIC Wire and Cable or visit the PIC website (www.picwire.com) to ensure the latest revision of the drawing is being viewed.