PIC Wire & Cable
A Division of the Angelus Corporation
Ph 262-246-0500 Fax 262-246-0450
PO Box 330 Sussex, WI 53089

Connector Specification	110677
Approved	Date 01/13/12
	Rev. 2 (06/20/13)
Distribution : USER	Uncontrolled Document

F Straight Plug

for V73263, V75268, and V76261

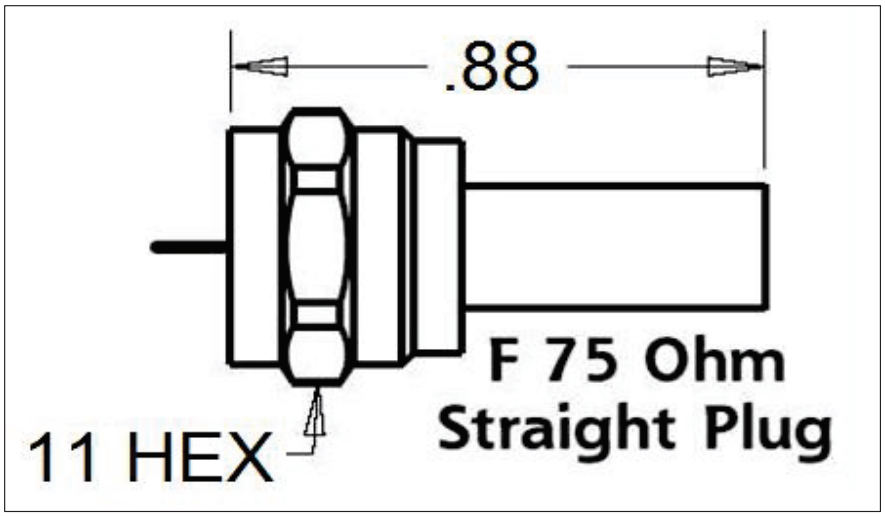

PERFORMANCE

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	325 VRMS

CONNECTOR WEIGHT (Each)

0.21 ounces (6.01 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Crimp Tooling:

Center Contact	M22520 / 2 - 01 Tool : Selector @ # 5 Recommended Positioner : DMC # K850
Crimp Ferrule	M22520 / 5 - 01 Tool : Die Set M22520 / 5 - 41 Cavity B (.178" hex) PIC P/N 110333, (Daniels # Y140)

CONSTRUCTION

Materials:

Body	Brass
Center Contact	Brass
Ferrule	Brass
Dielectric	PTFE

Finish :

Body, Ferrule	Nickel
Center Contact	Gold

Notes *:*

1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.

2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.

PIC Wire & Cable Connector User specification sheets are non-controlled documents. Please contact PIC Wire and Cable or visit the PIC website (www.picwire.com) to ensure the latest revision of the drawing is being viewed.