


A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0500 www.picwire.com  
 PO Box 330 Sussex, WI 53089

Approved : *MCT*  
 Distribution : USER

Date : 03/10/14  
 Rev 1 : 06/12/14  
 Uncontrolled Document

**USB 2.0 B Plug Connector**

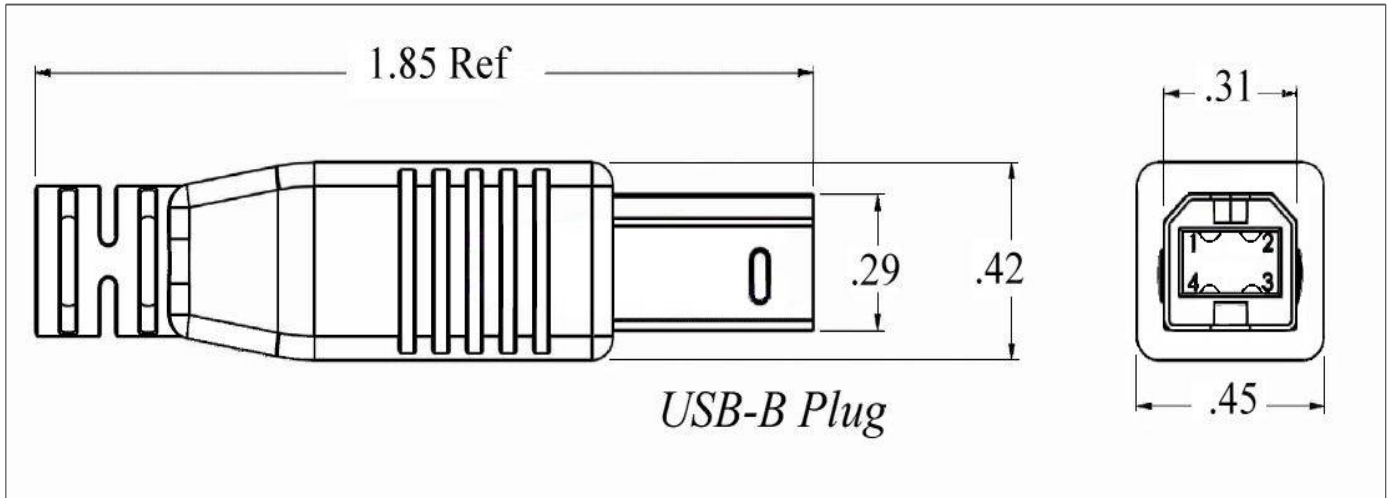

**PERFORMANCE**

Voltage Rating            30 VAC (R.M.S.)  
 Temperature Rating      - 55° to + 85° C

**CONNECTOR WEIGHT (Each)**

.20 ounces (5.59 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Crimp Tool for crimping  
 strain relief/cable shield - Tyco P/N 58433-1  
 Similar size circular crimp is acceptable.

**CONSTRUCTION**

**Materials:**

Body                                 Steel  
 Contacts                            Brass  
 Insulator                          Thermoplastic, UL 94V-0  
 Hood                                 ABS Resin - LSZH

**Finish :**

Contacts                             Gold  
 Body                                 Nickel

**Applicable Standards**        USB 2.0

**Notes :**

- 1) Two 1.0" pieces of Raychem ATUM heat shrink, P/N's ATUM-8/2-0 (1 ea.) & ATUM-4/1-0 (1 ea.) provided with connector for strain relief & moisture protection.
- 2) Please refer to T-110773 Termination Instructions for stripping dimensions & instructions.