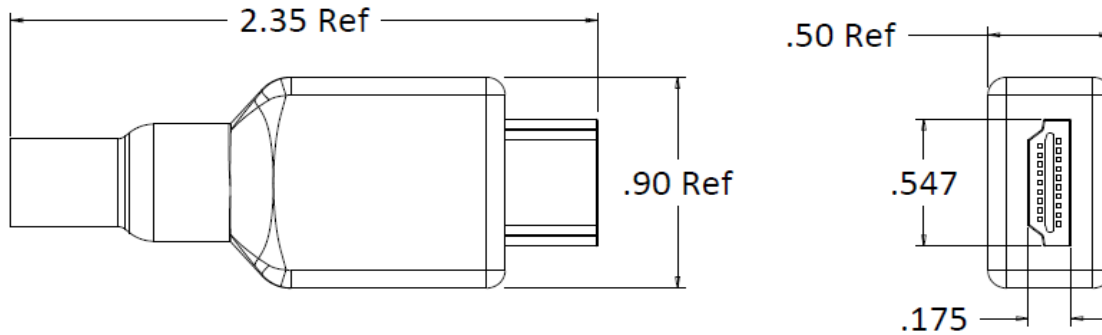


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 W220 N1051 Springdale Rd, Waukesha, WI 53089

Approved : *PFT*
 Distribution : USER

Date : 03/29/21
 Rev : 0
 Uncontrolled if Printed

HDMI 2.0 Type A Plug Connector*(For PIC Cable HDMI-1926-9T)***PERFORMANCE**

Voltage Rating 40 VAC (R.M.S.)
 Temperature Rating - 25° to + 80° C

CONNECTOR WEIGHT (Each)

0.36 oz (10.2 grams)

RoHS COMPLIANT

Complies to RoHS Standards

APPLICABLE STANDARDS

HDMI 1.4/2.0

CONSTRUCTION***Materials:***

Rear Shell	SPCC
Contacts	Copper Alloy
Solder Cups	Copper Alloy
Front Shell	Copper Alloy
Insulation Housing	Thermoplastic, Black; UL94V-0
Thin Wall Shrink Tube	Polyolefin (PO)
Drain Wire Shrink Tube	FEP
Strain Relief	ATUM Dual Wall Shrink Tube (MIL-DTL-23053/4, Class 3)

Finish :

Contacts	Gold
Front Shell	Gold
Solder Cups	Gold and Tin
Rear Shell	Nickel

INSTALLATION

Available as part of a PIC Wire and Cable assembly only.