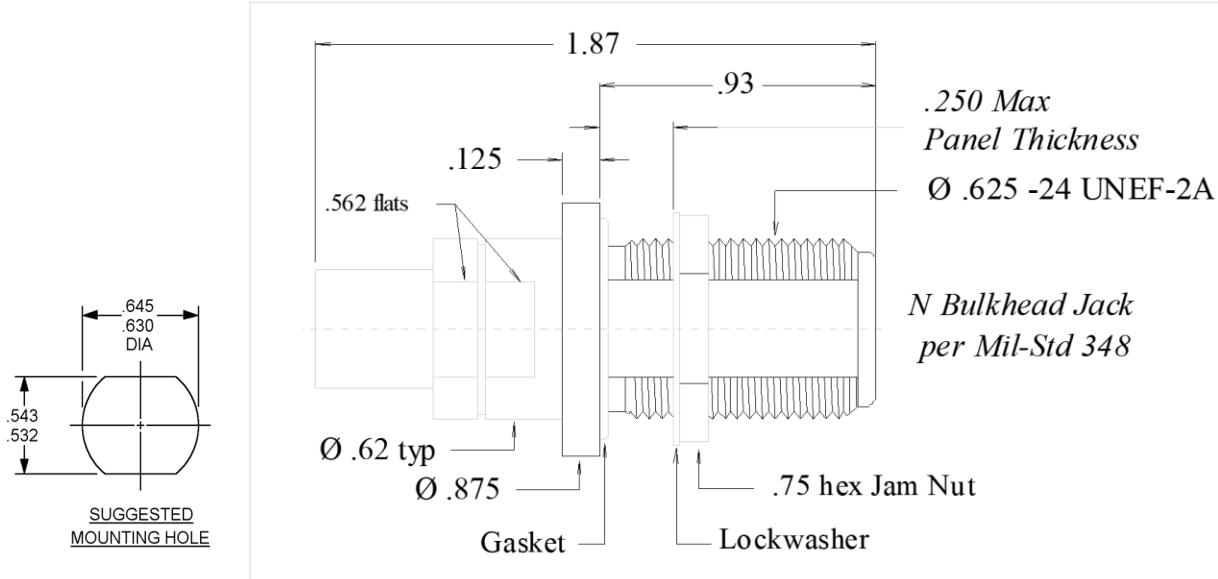


N Bulkhead Jack

for HT77300F Cable

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	DC - 18 GHz
Temperature Rating	- 65° to + 165° C
Voltage Rating	1000 V (rms)

CONNECTOR WEIGHT (Each)

1.83 ounces (51.94 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Solder-on Termination

CONSTRUCTION**Materials:**

Body	Stainless Steel
Solder Bushing	Brass
Center Contact	Beryllium Copper
Dielectric	Ultem

Finish :

Body	Passivated
Solder Bushing	Gold
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD-348, MIL-C-39012

Notes :

1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.

2) Please refer to T-120222 Termination Instruction sheet for strip dimensions & instructions.