
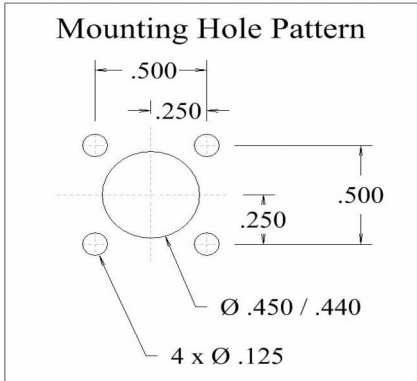
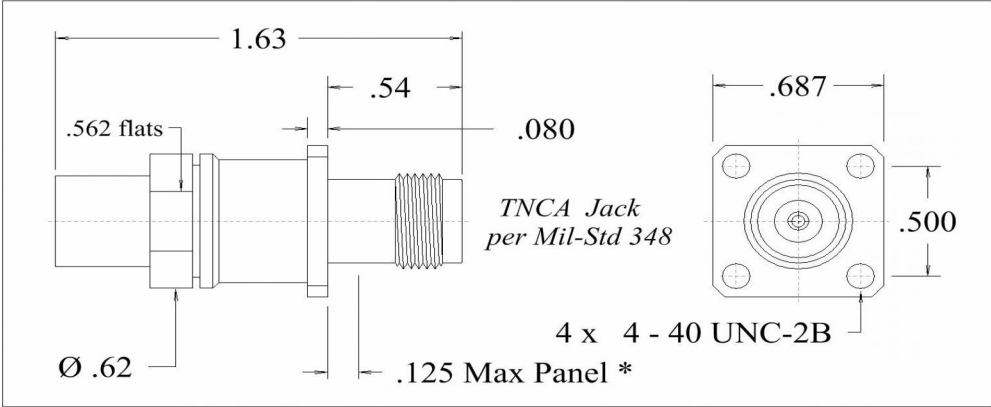


PIC Wire & Cable	Connector Specification	P/N 120626
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 01/28/16
	Distribution : USER	Rev. 1 (06/09/16)
		Uncontrolled if Printed

TNCA Panel Jack
for Cables S28110 & HH85295F



* For use Only on mounting panels using flush Flat Head Screws

PERFORMANCE

Nominal Impedance	50 Ohms
Frequency Range	DC - 18 GHz
Temperature Rating	- 65° to + 200° C
Voltage Rating	500 VRMS

CONNECTOR WEIGHT (Each)

1.07 ounces (30.39 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Solder-on Termination

CONSTRUCTION

Materials:

Body	Stainless Steel
Solder Bushing	Brass
Center Contact	Beryllium Copper
Dielectric	PTFE, Ultem

Finish :

Body	Passivated
Solder Bushing	Gold
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD-348B
 MIL-PRF-39012

Notes :

- 1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-120626 Termination Instruction sheet for strip dimensions & instructions.