The following notes *l* flags apply to all cable assemblies on this drawing :

- 1. All assembly work to be performed according to the A-10 assembly manual unless otherwise noted
- 2. XXXXX on label = PIC Wire & Cable serial number
- 3. Include appropriate test documentation with each shipment
- 4. Labels located 3 inches from back end of connector per PIC Work Instructions A-10 unless otherwise noted

The following notes *l* flags apply to cables as noted on subsequent pages :


- 5 All
 - All labels are white TMS type labels. Labels to be covered with clear heat shrink.
- 6 XXX in P/N is equal to length of Assy in inches. To order cable assembly specify 11012-3501-XXX. Example: 11012-3501-180 = 180" USB cable Assy. Note: 192" is max length allowed
- 7. Cut length of cable is equal to assembly length specified. Example: Cut length of 180" cable assembly is 180".
- 8. Length tolerance for USB cable assemblies is \pm 2.0"

REV DESCRIPTION DATE	APPROVED	
	7.0.1.00720	APPROVED
0 Initial Release 12/03/	3 MCT	MCT
Oa Changed length tolerance on all cable assemblies 04/28/	4 MCT	MCT

This drawing is proprietary to PIC Wire & Cable. No portion of this document may be reproduced or disclosed for any purpose without previous authorization from PIC Wire & Cable.

ACCEPTED:			Phone 26	WI 53089-0330 52-246-0500 2-246-0450
DATE:	APPROVALS	DATE	PE A TO TYPE B CABLE	ASSEMBLY
	DRAWN BY: PFT ENGINEER: PFT	12/03/13 12/03/13	CUSTOMER: N/A	REV Oa
	ENG MGR: MCT		S://11012-3501p1	

- 5 All labels are white TMS type labels. Labels to be covered with clear heat shrink.
- 6 XXX in P/N is equal to length of Assy in inches. To order cable assembly specify 11012-3501-XXX. Example: 11012-3501-180 = 180" USB cable Assy. Note: 192" is max length allowed
- 7. Cut length of cable is equal to assembly length specified. Example: Cut length of 180" cable assembly is 180".
- 8. Length tolerance for USB cable assemblies is \pm 2.0"

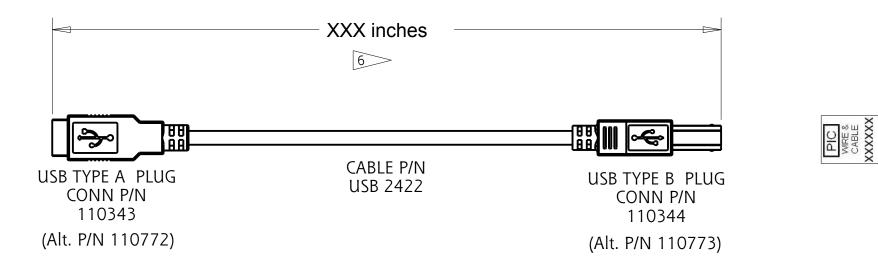

PIC P/N 11012-3501-XXX

This drawing is proprietary to PIC Wire & Cable. No portion of this document may be reproduced or disclosed for any purpose without previous authorization from PIC Wire & Cable.

SYSTEM: TEST REQUIREMENTS:

Test For Continuity and Shorts

surpose without previous dutionization from the wire of cubic.							
		FIIOTIE 202-240-030					
DESCRIPTION : USB TYPE A TO TYPE B CABLE ASSEMBLY							
DRAWING NUMBER : 11012-3501							
SIZE CAGE	CODE	CUSTOMER: N/A					
A OBCV	W9						
SCALE : NONE	FILE: S:	//11012-3501p2 SHEET: 2	OF 2				

5

11012-3501-XXX