


E61424

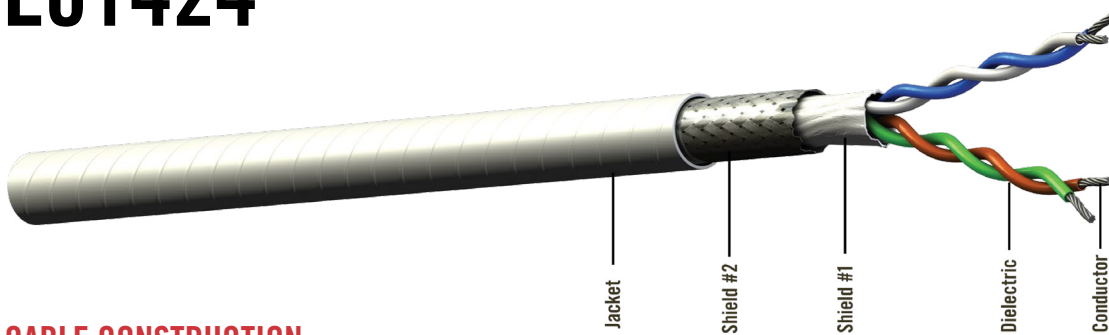

CABLE CONSTRUCTION

Conductors: Silver-Plated High Strength Copper Alloy
Dielectric: FEP
Shield #1: Aluminum/Polyester Foil
Shield #2 Silver-Plated Copper Braid

Jacket: ETFE, White (Laser Markable)

COLOR CODES

Pair #1: White/Blue
Pair #2: Orange/Green

The E61424 is a 2 pair, 10/100 Base-T CAT5e cable (exceeding ANSI/TIA-568-C.2 CAT 5e Channel Requirements) with a smaller overall diameter and weight while retaining performance and required operating parameters up to 269 ft. The twisted-pair construction of silver-plated high-strength copper alloy conductors assures uniform conductivity with excellent solderability. The 100% foil and 90% braided shielding provide mechanical strength and EMI protection and maintain weight and flexibility. A durable ETFE laser-markable jacket protects the cable against abrasion and environmental effects while maintaining flexibility for ease of installation. E61424 is suitable for airborne 10/100 Base-T CAT5e Local Area Network applications such as cabin management systems (CMS), in-flight entertainment (IFE), and Ethernet backbones.

PHYSICAL DATA

Conductor: 24 AWG Stranded SPHSCA
Shield Coverage: 100% (Foil), 90% (Braid)
Temperature Range: -55 to +200°C
Outer Diameter: in (mm) 0.223 (5.66)
Minimum Bend Radius: in (mm) 1.75 (44.45)
Weight: lbs/100 ft (kg/100 m) 2.98 (4.4)

ELECTRICAL DATA

Impedance: 100 ohms
Capacitance: pF/ft (m) 13.5 (44.3)
Velocity of Propagation: 80%
Dielectric Voltage Rating: (kV, RMS) 0.9
DC Resistance: ohms/1000 ft (m) 28.4 (93.2)
Max Distance*: ft (m) 269 (82)

ENVIRONMENTAL DATA

Skydrol Resistant: SAE AS4373E, Method 601
RoHS Compliant: RoHS Directive 2002/95/EC
Flame / Smoke Requirements: FAR Part 25.869 (a) App. F, Part 1, (a)(3)
Berry Specialty Metals Compliance: Complies with DFARS 252.225-7014, Alt 1

ATTENUATION DATA

Frequency	Nom / Max dB/100 ft	Nom / Max (dB/100 m)
@10 MHz	2.2/2.6	(7.2/8.5)
@100 MHz	6.0/7.2	(19.7/23.6)

All values nominal, unless otherwise noted

E61424 CAT 5E ETHERNET CABLE

CONTACTS/CONNECTORS FOR PART # E61424

PART #	CONTACT TYPE	TOOL PART #
190007	Shielded CAT 5e, Plug w/Strain Relief Sleeve (568A)	110340 - RJ45 Crimp Tool
190015	Shielded CAT 5e, Plug w/Strain Relief Sleeve (ISDN)	110340 - RJ45 Crimp Tool
110362	Shielded CAT 5e/CAT6, Plug w/Strain Relief Sleeve	110288 - RJ45 Crimp Tool 190048 - Insulation Compression Tool
190061	Shielded CAT 5e, Plug w/Protective Boot (568A)	110340 - RJ45 Crimp Tool
190062	Shielded CAT 5e, Plug w/Protective Boot (ISDN)	110340 - RJ45 Crimp Tool
110788	Shielded CAT 6, Plug w/ATUM Strain Relief (fits Amphenol® (RJF) ruggedized backshell)	110288 - RJ45 Crimp Tool 190048 - Insulation Compression Tool
110939	Shielded CAT 6a, Jack w/ATUM Strain Relief	110701 - Soft Jaw Clamping Pliers