


TT-3024A AERO-C RF CABLE WORKSHEET

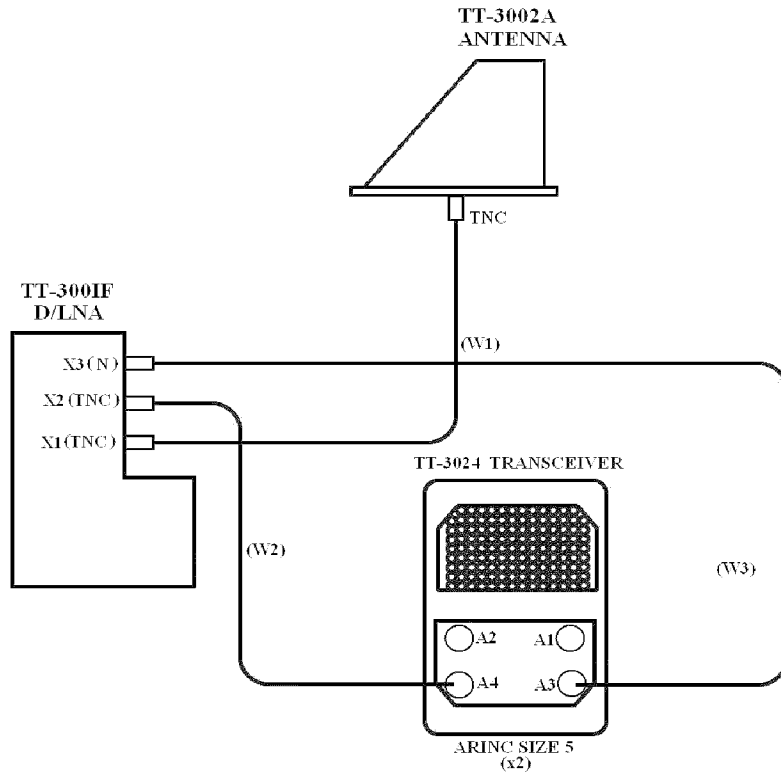

Cable (Test) Requirements :

Insertion Loss: W1 - 0.75 dB max @ 1.6 GHz.
 Insertion Loss: W2 & W3 - 19 dB max @ 1.6 GHz.
 VSWR : 1.5:1 max for each cable.

CABLE ASSEMBLY INFO:

W1 - LENGTH: _____
 CONN ANGLES: @ D/LNA _____ @ ANT. _____

*CONNECTOR ORIENTATION: _____

W2 - LENGTH: _____
 CONN ANGLE: @ D/LNA. _____


W3 - LENGTH: _____
 CONN ANGLE: @ D/LNA _____

LABELING: Standard labeling is P/N, S/N & connection Info.

***Connector Orientation**

(Assemblies ≤ 20 ft with (2) 90° Connectors)

Configuration Depicted : End B is **3:00 or 90°** from end A.

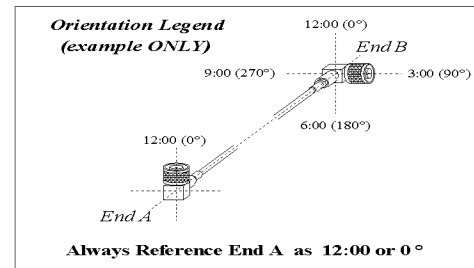

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____